


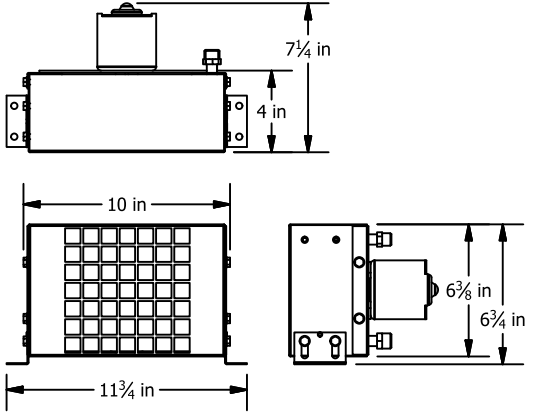
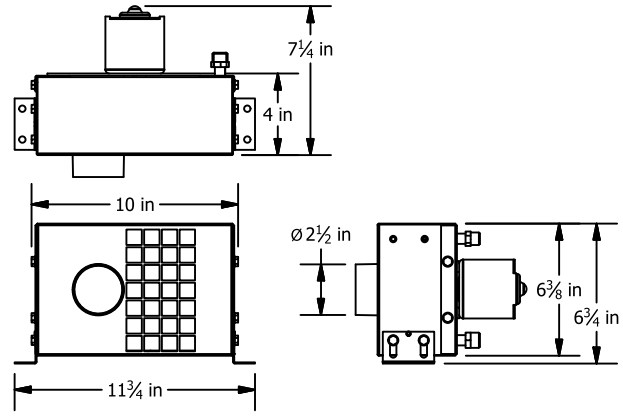
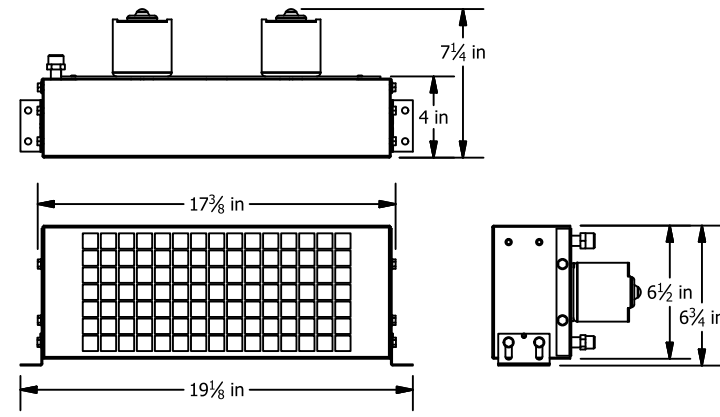


# 210 SERIES AUXILIARY HEATERS



Our high output, compact heaters utilize simple designs for trouble-free operation. Versatile mounting options include fittings for thru firewall or thru floor installations, making them ideal for any auxiliary heater application. Options include single fan, dual fan or duct hose outlet for defrost applications.

	 <b>210 Series</b> Most Popular Auxiliary Heater	 <b>211 Series</b> Auxiliary Heater with Defrost Includes 3ft Duct Hose and Louver	 <b>215 Series</b> High Output Dual Fan Auxiliary Heater
CAD			
BTU's	16,000 Heat	16,000 Heat	30,000 Heat
Air Flow	150 CFM	150 CFM	280 CFM
Unit Controls	Rotary 2 Speed Switch	Rotary 2 Speed Switch	Toggle Switch ON-OFF
Motor	Two Speed 12V - 6.6 AMPS @ 13.6 VDC 24V - 3.3 AMPS @ 26.8 VDC	Two Speed 12V - 6.6 AMPS @ 13.6 VDC 24V - 3.3 AMPS @ 26.8 VDC	Single Speed 12V - 13.2 AMPS @ 13.6 VDC 24V - 6.6 AMPS @ 26.8 VDC