
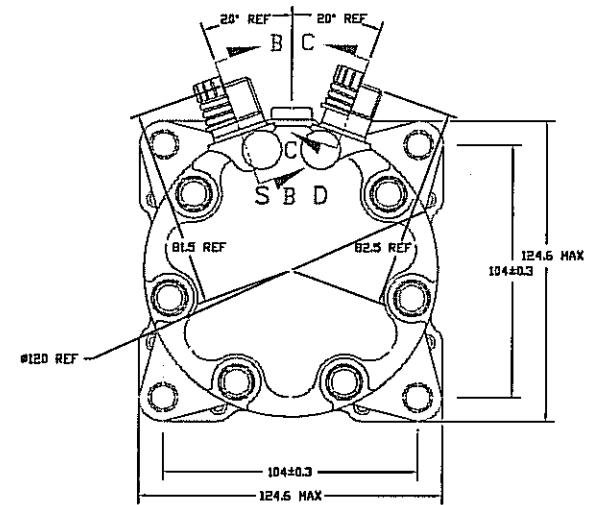


CLOCKWISE ROTATION

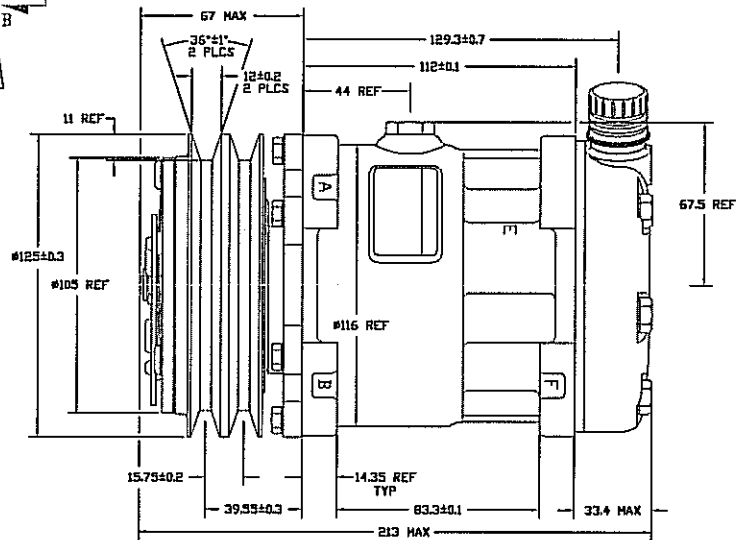

NOTE:
1. [G] AND [H] ARE THE OUTSIDE DIAMETERS OF 3/4\"/>

COMPRESSOR SPECIFICATIONS

DISPLACEMENT PER REVOLUTION	154.9 cc / rev. (9.5cuin. / rev.)
MAXIMUM ALLOWABLE R.P.M.	6000 R.P.M.
MAXIMUM ALLOWABLE CONTINUOUS R.P.M.	6000 R.P.M.
REFRIGERANT	R134a
OIL (SAE-15)	300 cc (10.1 fl.oz.)
WEIGHT	7.4 kg (16.4 lb.)

CLUTCH SPECIFICATIONS

RATED VOLTAGE	DC 12V
BREAKAWAY TORQUE	3.5 kgF-m NIN @ 12V
MINIMUM ENGAGEMENT VOLTAGE	7.5V @ AIR GAP 0.6mm REF
POWER CONSUMPTION	49 watts max.
BELT TYPE	A TYPE
MAXIMUM ALLOWABLE BELT TENSION	60 kgF per belt
FULLEY DIAMETER	#125mm (4.9 in.)
CLUTCH TYPE	HEAVY DUTY

REV	DATE	REVISIONS	MAN	DRW	CHK	APPV
1	1/16/78	CHANGED DRAWING NUMBER 807-0000 AND 200-0000
10-073	3/16/78	DELETED PART NUMBER DRAWING FROM LABEL
12000	4/16/78	CHANGED DIM. ANGLE 20° TO 1 1/2° PLUG 3 WAS 27° TO 1 1/2° PLUG 3
12000	5/1/78	CHANGED DIM. ANGLE 45° TO 45° PLUG 3 WAS 27° TO 1 1/2° PLUG 3
12000	5/1/78	CHANGED DIM. ANGLE 45° TO 45° PLUG 3 WAS 27° TO 1 1/2° PLUG 3
12000	5/1/78	CHANGED DIM. ANGLE 45° TO 45° PLUG 3 WAS 27° TO 1 1/2° PLUG 3
12000	5/1/78	CHANGED DIM. ANGLE 45° TO 45° PLUG 3 WAS 27° TO 1 1/2° PLUG 3
12000	5/1/78	CHANGED DIM. ANGLE 45° TO 45° PLUG 3 WAS 27° TO 1 1/2° PLUG 3

<p>SCALE REF IN [] REF IN METRIC []</p>	<p>THIS DRAWING IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF SANDEN. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED HEREIN. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.</p>
<p>INTERPRETATION OF THIS DRAWING PER ASME Y14.2M-1994</p>	<p>THREE ANGLE PREDICTION</p>
<p>DO NOT SCALE</p>	<p>COMPRESSOR SD7H15JD4627</p>
<p>4627-6000</p>	<p>REV H</p>